


Reducing Bushings

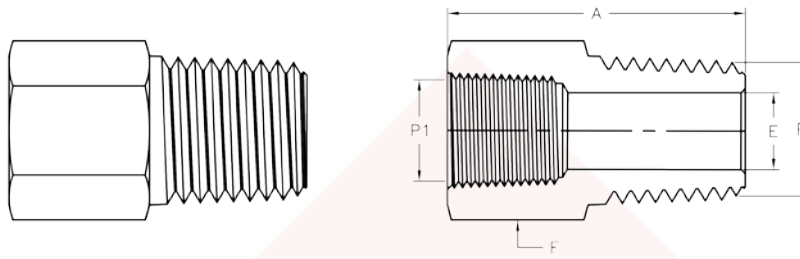


Male to Female NPT

RELYLOK Basic Part No.	P - Male NPT in.	P1 - Female NPT in.	A in. [mm]	E in. [mm]	F Hex	Max. Working Pressure psig [bar]	
						SS & CS	Brass
-2-RB-1	1/8	1/16	0.63 [16]	0.19 [4.8]	7/16	6400 [441]	3200 [221]
-4-RB-1	1/4	1/16	0.86 [21.8]	0.25 [6.4]	9/16	7500 [517]	3750 [259]
-4-RB-2		1/8		0.28 [7.1]		6000 [414]	3000 [207]
-6-RB-1	3/8	1/16	0.86 [21.8]	0.25 [6.4]	11/16	7200 [496]	3600 [248]
-6-RB-2		1/8		0.34 [8.6]		6400 [441]	3200 [221]
-6-RB-4		1/4		0.38 [9.7]		5300 [365]	2650 [183]
-8-RB-2	1/2	1/8	1.08 [27.4]	0.34 [8.6]	7/8	6600 [455]	3300 [228]
-8-RB-4		1/4	1.08 [27.4]	0.45 [11.4]		6400 [441]	3200 [221]
-8-RB-6		3/8	1.11 [28.2]	0.47 [11.9]		4600 [317]	2300 [159]
-12-RB-2	3/4	1/8	1.08 [27.4]	0.34 [8.6]	1-1/16	6400 [441]	3200 [221]
-12-RB-4		1/4		0.45 [11.4]		5300 [365]	2650 [183]
-12-RB-6		3/8		0.59 [15]		4900 [338]	2450 [169]
-12-RB-8		1/2		1.17 [29.7]		0.62 [15.7]	
-16-RB-2	1	1/8	1.36 [34.5]	0.34 [8.6]	1-3/8	4600 [317]	2300 [159]
-16-RB-4		1/4		0.45 [11.4]			
-16-RB-6		3/8		0.59 [15]			
-16-RB-6		1/2		0.73 [18.5]			
-16-RB-8		3/4		0.88 [22.4]			
-20-RB-12	1-1/4	3/4	1.47 [37.3]	0.94 [23.9]	1-3/4	3500 [241]	1750 [121]
-20-RB-16		1		1.17 [29.7]			
-24-RB-16	1-1/2	1	1.58 [40.1]	1.17 [29.7]	2	2900 [200]	1450 [100]
-24-RB-20		1-1/4		1.50 [38.1]		2700 [186]	1350 [93]

See Ordering Information and Technical Specifications on page 2.

Reducing Bushings

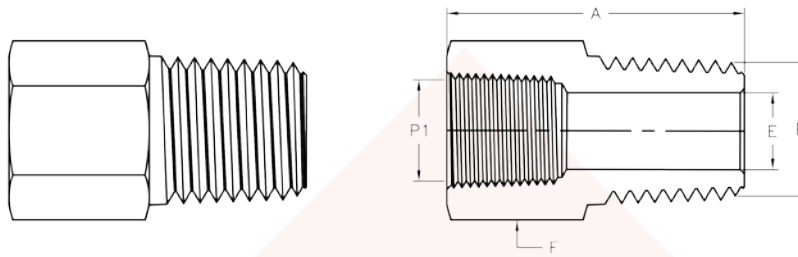

Male to Female BSP/ISO taper (PT)

RELYLOK Basic Part No.	P - Male BSPT/ISOT in.	P1 - Female BSPT/ISOT in.	A in. [mm]	E in. [mm]	F Hex	Max. Working Pressure psig [bar]		
						SS & CS	Brass	
-2PT-RB-1PT	1/8	1/16	0.63 [16]	0.19 [4.8]	7/16	6400 [441]	3200 [221]	
-4PT-RB-1PT	1/4	1/16	0.86 [21.8]	0.25 [6.4]	9/16	7500 [517]	3750 [259]	
-4PT-RB-2PT		1/8		0.28 [7.1]		6000 [414]	3000 [207]	
-6PT-RB-1PT	3/8	1/16	0.86 [21.8]	0.25 [6.4]	11/16	7200 [496]	3600 [248]	
-6PT-RB-2PT		1/8		0.34 [8.6]		6400 [441]	3200 [221]	
-6PT-RB-4PT		1/4		0.38 [9.7]		5300 [365]	2650 [183]	
-8PT-RB-2PT	1/2	1/8	1.08 [27.4]	0.34 [8.6]	7/8	6600 [455]	3300 [228]	
-8PT-RB-4PT		1/4	1.08 [27.4]	0.45 [11.4]		6400 [441]	3200 [221]	
-8PT-RB-6PT		3/8	1.11 [28.2]	0.47 [11.9]		4600 [317]	2300 [159]	
-12PT-RB-2PT	3/4	1/8	1.08 [27.4]	0.34 [8.6]	1-1/16	6400 [441]	3200 [221]	
-12PT-RB-4PT		1/4		0.45 [11.4]		5300 [365]	2650 [183]	
-12PT-RB-6PT		3/8		0.59 [15]		4900 [338]	2450 [169]	
-12PT-RB-8PT		1/2		1.17 [29.7]		0.62 [15.7]		
-16PT-RB-2PT	1	1/8	1.36 [34.5]	0.34 [8.6]	1-3/8	4600 [317]	2300 [159]	
-16PT-RB-4PT		1/4		0.45 [11.4]				
-16PT-RB-6PT		3/8		0.59 [15]				
-16PT-RB-6PT		1/2		0.73 [18.5]				
-16PT-RB-8PT		3/4		0.88 [22.4]				4200 [290]
-20PT-RB-12PT	1-1/4	3/4	1.47 [37.3]	0.94 [23.9]	1-3/4	3500 [241]	1750 [121]	
-20PT-RB-16PT		1		1.17 [29.7]				
-24PT-RB-16PT	1-1/2	1	1.58 [40.1]	1.17 [29.7]	2	2900 [200]	1450 [100]	
-24PT-RB-20PT		1-1/4		1.50 [38.1]				2700 [186]

See Ordering Information and Technical Specifications on page 2.